




## AMETEK Containment Tubing

AMETEK Containment tubing provides the clarity and chemical resistance of Fluoropolymer tubing with the safety of a Dual containment.

- UHP PFA Primary containment for universal chemical resistance and purity.
- FEP Secondary containment for flexibility and a second level of protection.
- Good wear and abrasion resistance.
- Continuous use temperature up to 500°F.
- Meets ASTM D-3296
- Laser marking for both primary and secondary tubes

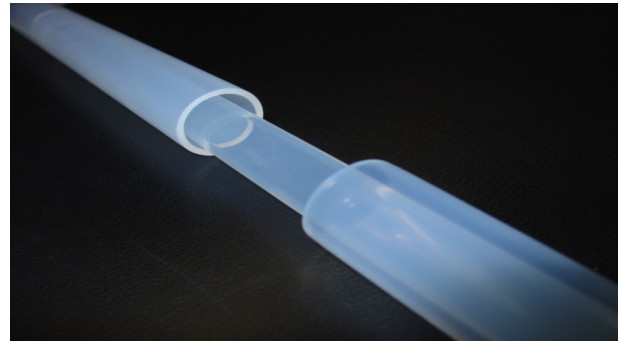

Custom sizes available upon request.

### Tubing

FEP Secondary Containment OD	ID/OD Tolerance	Wall Thickness	PFA Primary Containment OD	ID/OD Tolerance	Wall Thickness	Minimum Bend Radius
2.000"	0.020"	0.075" +/- 0.010"	1.250"	0.012"	0.075" +/- 0.010"	60"
1.500"	0.015"	0.075" +/- 0.010"	1.000"	0.010"	0.062" +/- 0.008"	30"
1.500"	0.015"	0.075" +/- 0.010"	0.750"	0.008"	0.062" +/- 0.008"	30"
1.000"	0.010"	0.062" +/- 0.008"	0.750"	0.008"	0.062" +/- 0.008"	12"
1.000"	0.010"	0.062" +/- 0.008"	0.625"	0.007"	0.062" +/- 0.008"	12"
0.750"	0.008"	0.062" +/- 0.008"	0.500"	0.006"	0.062" +/- 0.008"	9"
0.500"	0.008"	0.062" +/- 0.008"	0.250"	0.005"	0.062" +/- 0.008"	3"

Packaging and Handling- AMETEK Containment tubing is produced and packaged under strict standards of cleanliness, with capped ends and tubing double bagged and sealed in plastic for clean storage. AMETEK Containment tubing can also be supplied on plastic spools, overwrapped with plastic for added protection.

Plastic spools for 1.50" OD and above are provided with a charge which is credited when the spools are returned.